

## UB-01 Upstand Board

A composite board of EPS (various grades available) bonded to a 6mm rigid calcium silicate sheet. For use with flat roof systems where a robust, faced upstand board is required. Available in a range of thicknesses and grades depending on the application and thermal requirement.

### EPS Features

- CFC, HFC and HCFC-free
- Ozone Depletion Potential of zero
- Global Warming Potential <5
- BRE Green Guide A generic rating
- Easy handling and installation


### Technical Data

#### U Values

Contact our technical department for further advice.

#### Installation

Must be installed in accordance with manufacturer's recommendations. Contact our technical department for further information and compatibility.

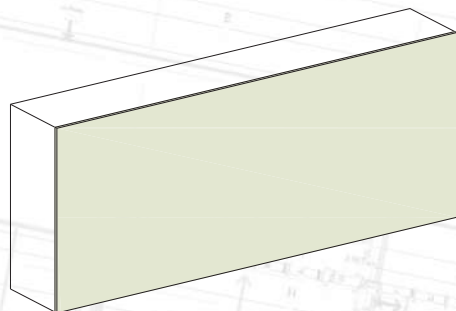

### Technical Data

<b>Thermal Conductivity</b>	EPS - 0.033-0.035 W/mK
<b>Compressive Strength</b>	150-200 kPa @ 10% compression
<b>Board Size</b>	1200 x 600, 400mm (others available)
<b>Thickness</b>	80, 100, 120mm (others available)

The manufacturer reserves the right to alter these products. All data was produced under controlled test conditions. No warranty is implied or given as to the performance of these products in any variation from test conditions.