





CTF-Ultra VIP-A2-Warm roof systems combine various individual CTF products to provide a complete A2 fire rated insulation system to meet any required specification and u value for warm roof application.

CTF-Ultra VIP- A2-10

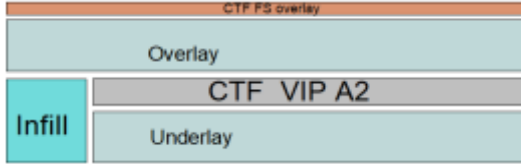


CTF-Ultra VIP-A2-10.1

CTF-FS1 / CTF-FS2 overlay
 CTF-10 overlay
 CTF-VIP-A2 | CTF-10 infill
 CTF-10 underlay

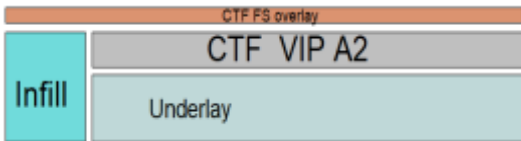


CTF-Ultra VIP- A2-10.2

CTF-FS1 / CTF-FS2 overlay
 CTF-VIP-A2 | CTF-10 infill
 CTF-10 underlay

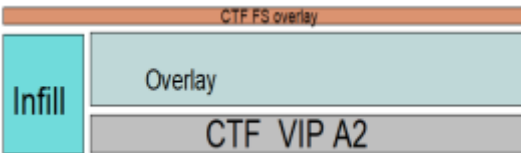

CTF-Ultra VIP-A2-10.3

CTF-FS1 / CTF-FS2 overlay
 CTF-10 overlay
 CTF-VIP-A2 | CTF-10 infill

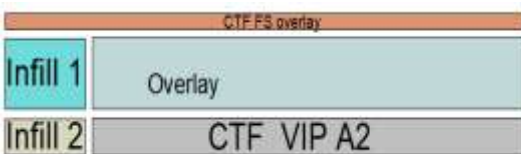

CTF-Ultra VIP-A2-10.4

CTF-FS1 / CTF-FS2 overlay
 CTF-10 overlay
 CTF-VIP-A2 | CTF-10 infill | CTF-Amagel infill

Features

Refer to product technical data sheets; CTF-FS1, CTF-FS2, CTF-10, CTF-VIP-A2, CTF-Amagel

Storage & Handling

Refer to product technical data sheets; CTF-FS1, CTF-FS2, CTF-10, CTF-VIP-A2, CTF-Amagel

Installation & Fixing

Refer to product technical data sheets; CTF-FS1, CTF-FS2, CTF-10, CTF-VIP-A2, CTF-Amagel

Protection

Adequate temporary protection must be provided above the installed insulation system especially where any of the following occur:

- Unloading materials onto roof
- Temporary walkways and access
- Storing materials on roof
- Or any other activity that can cause damage to the system

Technical Data

Refer to product technical data sheets; CTF-FS1, CTF-FS2, CTF-10, CTF-VIP-A2, CTF-Amagel

Under no circumstances should the system be used as a working platform including skips, scaffolding or other trades material storage unconnected to the roofing works.

